

# Care Instructions

## Reflexite® Radiance Heat Activable Retroreflective Film

For garments application

Bulletin #CARE-10


### General Information

**Reflexite® RADIANCE AND PERFORMANCE** cleans as well at lower temperatures as it does at higher temperatures. To permit environmentally friendly washing, reduce cost, and extend the life of the garment, select the lowest washing temperature that will ensure adequate cleaning of the fabric.

It may be necessary to modify the care label of garments with **Reflexite® RADIANCE AND PERFORMANCE** applied to ensure that the performance of the reflective tape is not compromised through improper care.

We cannot guarantee that the trim, fused to a garment will survive a specific number of wash cycles. The wash performance will depend on chemical surface treatments on the fabric, application methods, as well as variability in the fabric manufacturing process.

### RECOMMENDED CARE SYMBOLS:

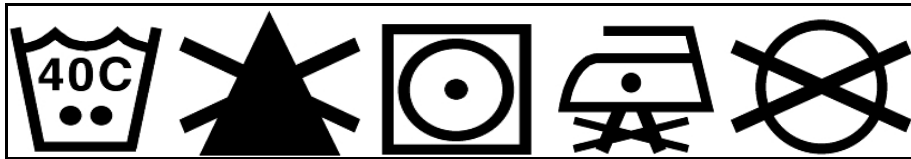

### HAND WASHING:

Hand washing can be done with a sponge, a soft fabric cloth or a soft brush with lukewarm water and a mild detergent. After washing the trim must be rinsed with clean water.

Stubborn stains such as grease or tar may be spot cleaned with petrol, alcohol, naphtha or turpentine. After spot cleaning the trim must be hand washed as above and rinsed with water.

### HOUSEHOLD WASHING:

Washer	Standard household washing machine
Temperature	30° to 40° C
Detergent	Household detergent. Use detergents with moderate pH levels. Avoid using detergents with high pH levels.
Setting	“Colored clothing without pre-wash” . Normal cycle

### BLEACHING:

Do not use bleach.

### HOUSEHOLD DRYING:

Household tumble dryer  
Set to medium heat. Maximum exhaust temperature 65°C (150 ° F). Dry to “slightly humid “.  
Do not over dry. For extended life, it is recommended that the garment be turned inside out before drying.  
This should be done as soon as possible after the wash cycle.  
Avoid prolonged exposure to high pH water.

### CHEMICAL CLEANING / DRY CLEANING:

Dry cleaning is not recommended.

### IRONING:

Do not use steam. Use a cool or warm temperature setting.  
Avoid direct contact of the tape when ironing, use a press cloth.

If edges of trim begin to lift, turn garment inside out and press with an iron on high setting with firm pressure for 15 seconds, using an ironing board after use and washing.

# Care Instructions

## Reflexite® Radiance Heat Activable Retroreflective Film

*For garments application*

Bulletin #CARE-10

### **IMPORTANT NOTICE**

All Reflexite products are subject to careful quality control throughout the manufacturing process and are warranted to be of merchantable quality and free from manufacturing defects.  
Published information concerning Reflexite products is based upon research which the Company believes to be reliable although such information does not constitute a warranty.  
Because of the variety of uses of Reflexite products and the continuing development of new applications, the purchaser should carefully consider the suitability and performance of the product for each intended use, and the purchaser shall assume all risks regarding such use. All specifications are subject to change without prior notice.

### **Reflexite EMEA Conversion Center**

Unit 5, Cleaboy Business Park,

Old Kilmeaden Road,

Waterford, Ireland.

Tel. +353 51 359400

Fax. +353 51 359459

[www.reflexite.eu](http://www.reflexite.eu)

Reflexite ® is a registered trademark of Reflexite Corporation, Avon CT, USA

Technical Publication EU-CARE-10, Pub.2 Feb 2006

© 2006, Reflexite Europe