

Application Instructions

Reflexite® FTP1200 Advanced

For application to Fire Fighters' Protective Clothing
Bulletin #APP-27

GENERAL INFORMATION

Reflexite® FTP1200 Advanced has been designed to meet or exceed the requirements of EN469 and EN471, offering superior reflectivity and durability under today's most demanding fire-fighting conditions. The tapes are produced with an application border. The following measures should be taken to achieve the optimum performance from the tapes.


For more information on FTP1200 Fire Tape Plus, please reference Technical Product Bulletins, which are available from local Reflexite Sales Offices or www.reflexite.eu

SEWING TO GARMENT BACKGROUND FABRIC

Sewing Machine Settings

Reflexite garment tapes may be sewn onto garments. Always ensure that the sew line is centered between within the area shown below, never allow the sew line to run into any of the sealed cells of the tape.

See drawing below, please sew in the border shown

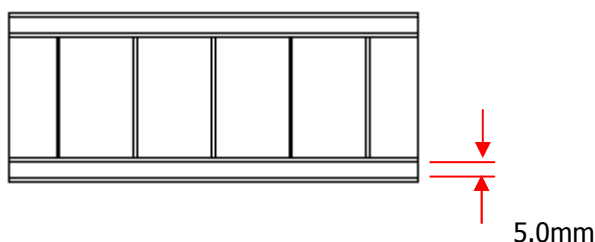

Recommended stitches: 8 per 25 mm.
We recommend taking the following measures if the tape binds when being sewn:

1. Reduce pressure on the machine foot
2. Use a teflon coated pressure foot, if necessary
3. Use of a silicone spray or silicon coated cloth will help to lubricate the surface of the tape.

Background Fabric

Reflexite has performed compatibility checks with many readily available background fabrics. We cannot give an open guarantee that the chosen background fabric is fully compatible please check with the manufacturer of the fabric before use.

Note –

Do not stretch the tape as it is being applied. Reflexite recommends that the tape is turned under and sewn through the doubled over edge. This helps prevent moisture ingress. Where possible within the design of the garment the cut ends should be inside the seams of the garment

IMPORTANT NOTICE

All Reflexite products are subject to careful quality control throughout the manufacturing process and are warranted to be of merchantable quality and free from manufacturing defects.

Published information concerning Reflexite products is based upon research, which the Company believes to be reliable although such information does not constitute a warranty.

Because of the variety of uses of Reflexite products and the continuing development of new applications, the purchaser should carefully consider the suitability and performance of the product for each intended use, and the purchaser shall assume all risks regarding such use. All specifications are subject to change without prior notice.

Reflexite EMEA Conversion Center

Unit 5, Cleaboy Business Park,
Old Kilmeaden Road,
Waterford, Ireland.
Tel. +353 51 359400
Fax. +353 51 359459
www.reflexite.eu

Reflexite ® is a registered trademark of Reflexite Corporation, Avon CT, USA

Technical Publication EU-APP-27 Pub. 2007
© 2007, Reflexite Europe
Rev. 1